

Monofocal



The World of Acriva^{UD}

Premium Material

Innovative Optic Engineering

Ultra Definition

All Square 360° Enhanced Edge

Wide Diopter Range and Different Haptic Platforms

Best of Both Worlds

Better Visual Quality

Advanced Vision of Aspheric Design

Real PCO Barrier

Complete Solutions



Excellent Combination



Premium Material

Best of Both Worlds

Excellent material combination of 2-Oxiethylmethacrylate and 2-Hydroxymethacrylate monomers creates hydrophobic surface behavior with the advantage of hydrophilic flexibility.




Proven Hydrophobic Surface Behavior

Acriva^{UD} has similar contact angle measurements with similar to pure hydrophobic IOLs. An independent comparative study showed that the hydrophobic surface of Acriva^{UD} is similar to that of pure hydrophobic competitors¹.

Benefits of Hydrophobic and Hydrophilic Monomers

- No glistening
- Limited PCO
- High biocompatibility
- ■Low inflammatory response
- ■No calcification
- ■Easy to fold and inject
- MICS capability
- ■Quickly unfolding in the eye

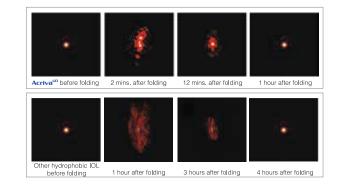

Better Flexibility

The elastic co-polymer of Acriva^{up} has precise memory. Point Spread Function (PSF) shows that the optic quickly recovers its initial shape within an hour, much quicker than hydrophobic IOLs.

References

¹⁻ Tuncer ÇAYKARA, Contact Angle Measurements of Intra-Ocular Lenses (IOL). Republic Of Turkey Gazi University Office Of Dean Of Sciences And Letters File: B.30.2.GÜN.0.10.82.00-2431 July 14, 2009. 2- Data on file




Advanced Vision



Innovative Optic Engineering

Better Visual Quality

The MTF of all **Acriva**^{UD} lenses is checked one by one and value is always above international standards. All **Acriva**^{UD} products demonstrate superior MTF and smooth surface topography, thanks to our innovative optic engineering.

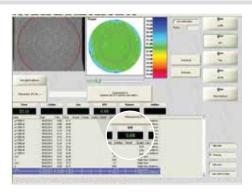

Modular Transfer Function

MTF is a direct and quantitative measurement of optic system quality. The best result through obstacles is 0.7 at 100 lpm. According to international standards the MTF results with an IOL must be above 0.43 at 100 lpm³. VSY Biotechnology has determined its own quality control limits far stricter than international standards.



Ultra Definition Optic

Advanced Vision of Aspheric Design

Ultra Definition optic design corrects spherical aberrations coming from both cornea and IOL. However, **Acriva**^{uo} IOLs have a slight negative asphericity, which maintains part of the positive aberration of the cornea, helping patient to keep better depth of focus.^{4, 5}.



Advantage of Ultra Definition Design

- Improved contrast sensitivity under low light conditions
- Preserved depth of focus
- Less sensitive to decentration

References

3- International Standard Iso 11979-2:1999 Technical Corrigendum 1 ICS 11.040.70 Ref. No. ISO 11979-2:1999/Cor.1:2003(E) Published 2003-11-01 4- Holladay JT, Piers PA, Korayni G, et al. A new intraocular lens design to reduce spherical aberration of pseudophakic eyes. J Refract Surg. 2002, 18 (6):683-691. 5- Belluci R, Morselli S, Piers P. comparison of wavefront aberrations and optical quality of eyes implanted with five different intraocular lenses. J Refract Surg. 200,20(4):297-306.



Different Platforms



All Square 360° Enhanced Edge

Real PCO Barrier


The innovative edge design tends to greatly reduce PCO risk by making a geometric and mechanical barrier against cells proliferation. The edge design allows for thinner lenses for equivalent power than other competitors





Superior Chromatic Aberration Control

Clear Vision

Abbe Number of Acriva^{UD} is 58, one of the highest numbers on the IOL market, measured by an independent laboratory⁸. The entire Acriva^{UD} line goes through this Superior Chromatic aberration control.

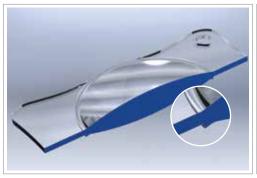



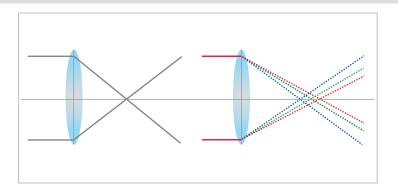

Exceptional Design

All Square 360° enhanced edge and premium material form a dual barrier against the risk of posterior capsule opacification after implantation. Recent studies have shown than square edge on posterior surface of the optic is the most important IOL-related factor against PCO formation.^{6,7}.

The Importance of Abbe Number

Chromatic aberration is a type of distortion in optical system formed by different wavelengths of light to have different focal points. The higher the Abbe number is the lower the chromatic dispersion is⁹.

References

6- Can I., Ceran BB., Soyugelen G., Takmaz T. Comparison of clinical outcomes with 2 small-incision diffractive multifocal intraocular lenses. Journal of Cataract & Refractive Surgery 2012 Vol 38 No. 1 7- Data on file. 8- VSY Biotechnology R&D Technical Report RD19062014-1 9- Huawei Zhao, Martin A Mainster The effect of chromatic dispersion on pseudophakic optical performance Br J Ophthalmol 2007;91:1225–1229.









Optic Size	6.00mm
Optic Design	Biconvex
Haptic Size	13.00mm
Haptic Design	Modified C
Haptic Angle	O°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T : 118.4 - Srk-II : 118.6
Diopter Power Range	From 0.0D to +32.00 D (0.50D increments)
Special Production	From -20.00D to -0.50D and +32.50D to
	+45.00D (0.50D increments)
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet Green 2.0 (Up to 25.0 D)
Cartridge System	Acrijet Green 2.2 (Up to 30.0 D)

Optic Size	6.00mm
Optic Design	Biconvex
Haptic Size	12.50mm
Haptic Design	Balance Modified C
Haptic Angle	O°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T : 118.4 - Srk-II : 118.6
Diopter Power Range	From 0.0D to +32.00 D (0.50D increments)
Special Production	From -20.00D to -0.50D and +32.50D to
	+45.00D (0.50D increments)
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet Green 2.2 (Up to 30.0 D)
Cartridge System	













HAF

Optic Size	6.00mm
Optic Design	Biconvex
Haptic Size	11.00mm
Haptic Design	Plate Haptic
Haptic Angle	0°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T : 118.7 - Srk-II : 119.0
Diopter Power Range	From 0.0D to +32.00 D (0.50D increments)
Special Production	From -20.00D to -0.50D and +32.50D to +45.00D
	(0.50D increments)
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet Green 1.8 (Up to 25.0 D)
Cartridge System	Acrijet Green 2.0 (Up to 28.0 D)
	Acrijet Green 2.2 (Up to 30.0 D)

Optic Size	6.50mm
Optic Design	Biconvex
Haptic Size	13.75mm
Haptic Design	Balance Modified C
Haptic Angle	0°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T: 118.4 - Srk-II: 118.6
Diopter Power Range	From 0.0D to +32.00 D (0.50D increments)
Special Production	From -20.00D to -0.50D and +32.50D to
	+45.00D (0.50D increments)
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet
Cartridge System	







Blue Light Filtration

Optimum Filtration Range
Natural Chromophore
Ideal Concentration

Balanced Photoprotection of UVA and Violet Spectrum

Same Transmission Properties than Natural Lens

Improved Contrast Sensitivity



Efficient Protection





Optimum Filtration Range

Balanced Photoprotection of UVA and Violet Spectrum

Acriva ^{up} BB provides excellent photoprotection from potential damage of the UVA and violet spectrum without blocking blue light. Acriva ^{up} BB ensures 95% blue light transmission at 480nm which is known as critical in controlling the circadian rhythm ^{8, 9, 10, 11, 12}.

The choromophore used in Acriva^{uo} BB material has a similar chemical structure to the chromophore naturally present in the human lens, thus giving a transmission structure comparable to the one of a young healthy eye.

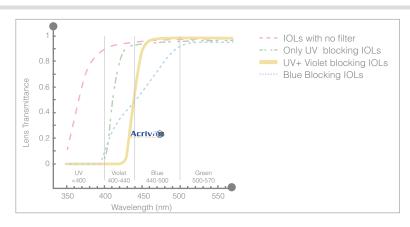

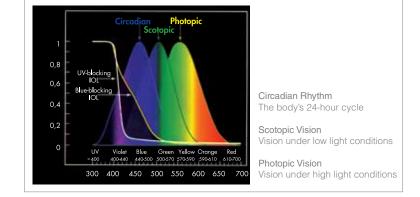

Importance of Blue Light

Blue light plays a crucial role in controlling the circadian rhythm and endogenous melatonin secretion. Disorganisation of the circadian rhythm is more common in older adults and people with insomnia¹³, depression^{14, 15} and dementia¹⁶. Blue-blocking IOLs, which contain synthetic dye filter up to 500 nm causes excessive filtering of blue light.

References

8- Dacey DM, Liao HW, Peterson BB, et al. Melanopsin-expressing ganglion cells in primate retina signal colour and irradiance and project to the LGN. Nature 2005; 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005; 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005; 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanopsin. Nature 2005. 433; 749-54. 9- Qiu X, Kumbalasiri T, Carlsan SM et. al. Induction of photosensitivity by heterologus expression of melanops. Nature 2005. 433698–899.899 12- Van Gelder R N. Blue light and the circadian clock. Br J Ophthalmology. 206:90.699.699 12- Van Gelder R N. Blue light and the circadian clock. Br J Ophthalmology. 206:90.699.699 12- Van Gelder R N. Blue light and the circadian clock. Br J Ophthalmology. 206:90.699.699 12- Van Gelder R N. Blue light and the circadi




Superior Clarity




Natural Chromophore

Similar Transmission Properties to Natural Lens

Acriva^{uD} BB contains 3-hydroxykynurenine which is similar to the chromophore present in the human natural lens.



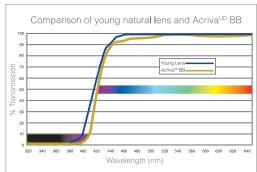


Chromophore structure of Acriva^{UD} possesses the same transmission as a human natural crystalline lens with a good protection of the macula against UV-A and blue light thanks to the absorption curve which mimics the human crystalline lens, preserving the natural color perception and contrast sensitivity.

3

Ideal Concentration

Improved Contrast Sensitivity

Acriva^{uD} BB's chromophore concentration is 0,02%. It has a clearer color in comparison to IOLs with higher concentrations of chromophores. Low concentration of Acriva^{uD} BB doesn't influence color perception of the patient.

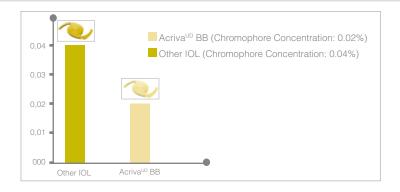

Natural chromophore and its lower concentration provide a higher contrast sensitivity under low light conditions.









toric

BBT UDM 611

	BB	UD	61	3
--	----	----	----	---

Material	Hydrophobic surface, acrylic with 25% water
	content, blue filter
Optic Size	6.00mm
Optic Design	Monofocal
Haptic Size	13.00mm
Haptic Design	Modified C
Haptic Angle	0°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T:118.4 - Srk-II:118.6
Diopter Power Range	From -20.00D to +45.00D (0.50D increments)
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet Green 2.0 (Up to 25.0 D)
Cartridge System	Acrijet Green 2.2 (Up to 30.0 D)

Material	Hydrophobic surface, acrylic with 25% water
	content, blue filter
Optic Size	6.00mm
Optic Design	Monofocal
Haptic Size	11.00mm
Haptic Design	Plate Haptic
Haptic Angle	0°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T:118.7 - Srk-II:119.0
Diopter Power Range	From -20.00D to +45.00D (0.50D increments)
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet Green 1.8 (Up to 25.0 D)
Cartridge System	Acrijet Green 2.0 (Up to 28.0 D)
	Acrijet Green 2.2 (Up to 30.0 D)

Material	Hydrophobic surface, acrylic with 25% water content,
	blue filter
Optic Size	6.00mm
Optic Design	Monofocal Toric
Haptic Size	11.00mm
Haptic Design	Plate Haptic
Haptic Angle	O°
Recommended Ac. A Constant	118.0
Recommended Op. A Constant	Srk-T:118.6 - Srk-II:118.9
Diopter Power Range	Spheric: From 0.00D to +32.00D (0.50D increments)
(CUSTOM MADE)	Cylindric: From +1.00D to +10.00D (0.50D increments
Refractive Index Dry	20°C /35°C 1.509 / 1.509 ± 0.002
Refractive Index Wet	20°C /35°C 1.462 / 1.462 ± 0.002
Recommended Injector &	Acrijet Green 1.8 (Up to Sph 25.0 D Cyl 5.0 D)
Cartridge System	Acrijet Green 2.0 (Up to Sph 28.0 D Cyl 5.0 D)
	Acrijet Green 2.2 (Up to Sph 30.0 D Cyl 5.0 D)















BB UD 613 BB UDM 611

- Acriva^{∪D} BB Toric

– Acriva^{uD} BB



BB T UDM 611





